


**Piled Raft Slab**

**Ideal equipment used for piling of this nature is the TD308. It is primarily designed to work inside buildings with standard domestic headroom, or on difficult access sites, such as embankments and tunnels.**  
**For its size, it is the most powerful rig on the market yielding amazing production rates.**

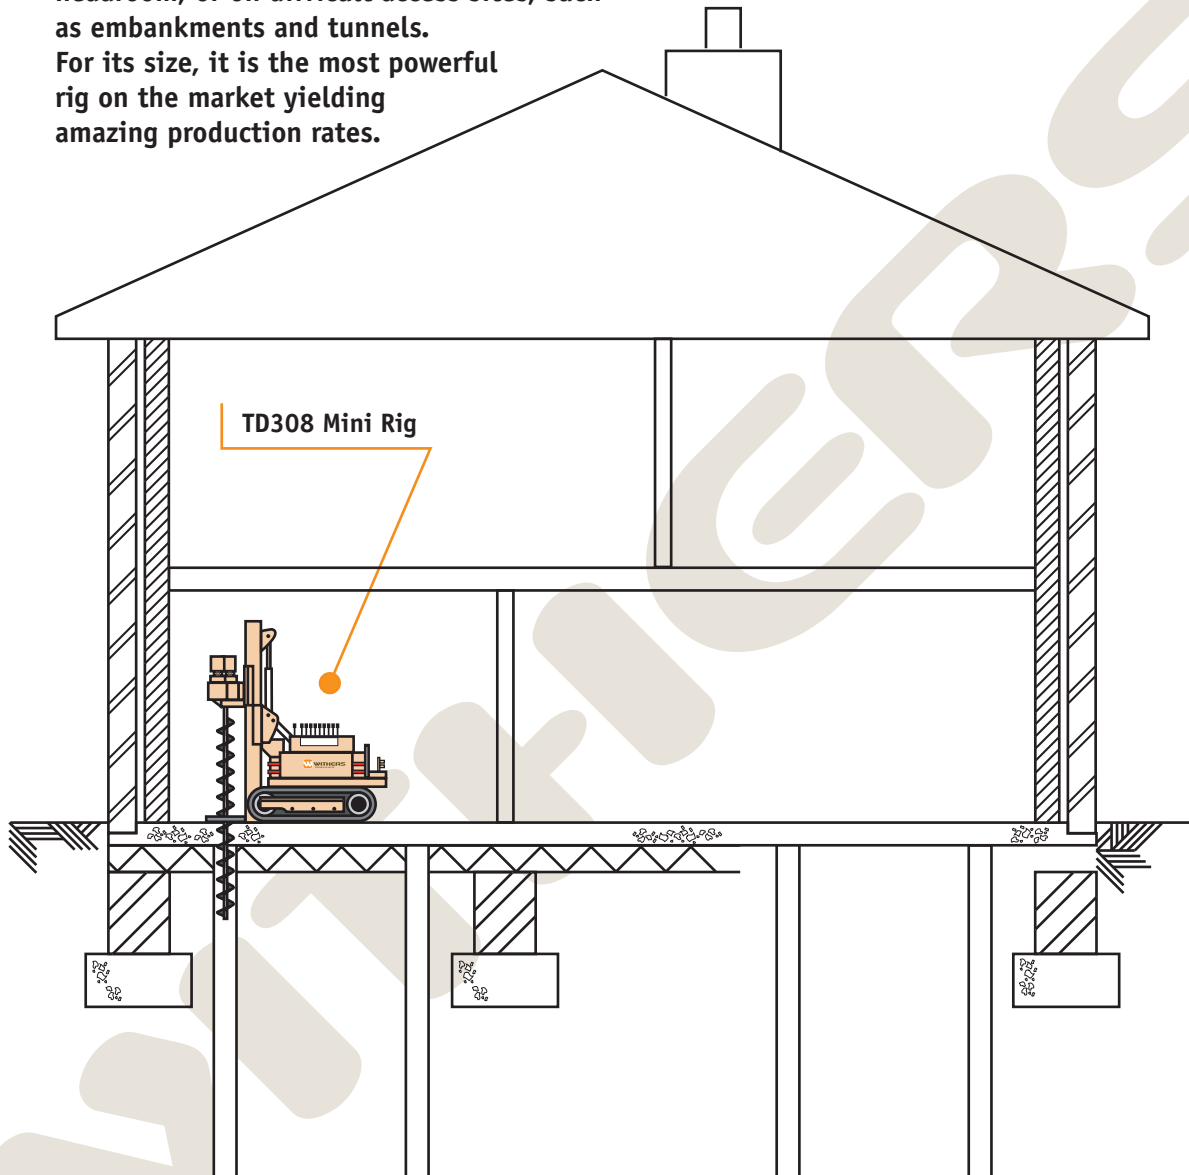

**Method**

1. All ground floor fixtures and fittings removed.
2. Existing ground floor construction removed.
3. Grid of piles installed to engineers design.
4. New reinforced concrete slab installed to support all load bearing walls.
5. Anti clay heave precautions incorporated if necessary.
6. Original foundations are fully separated from all new foundation.
7. Property is reinstated as specified.