


Suitability

For use in granular and water bearing soils.

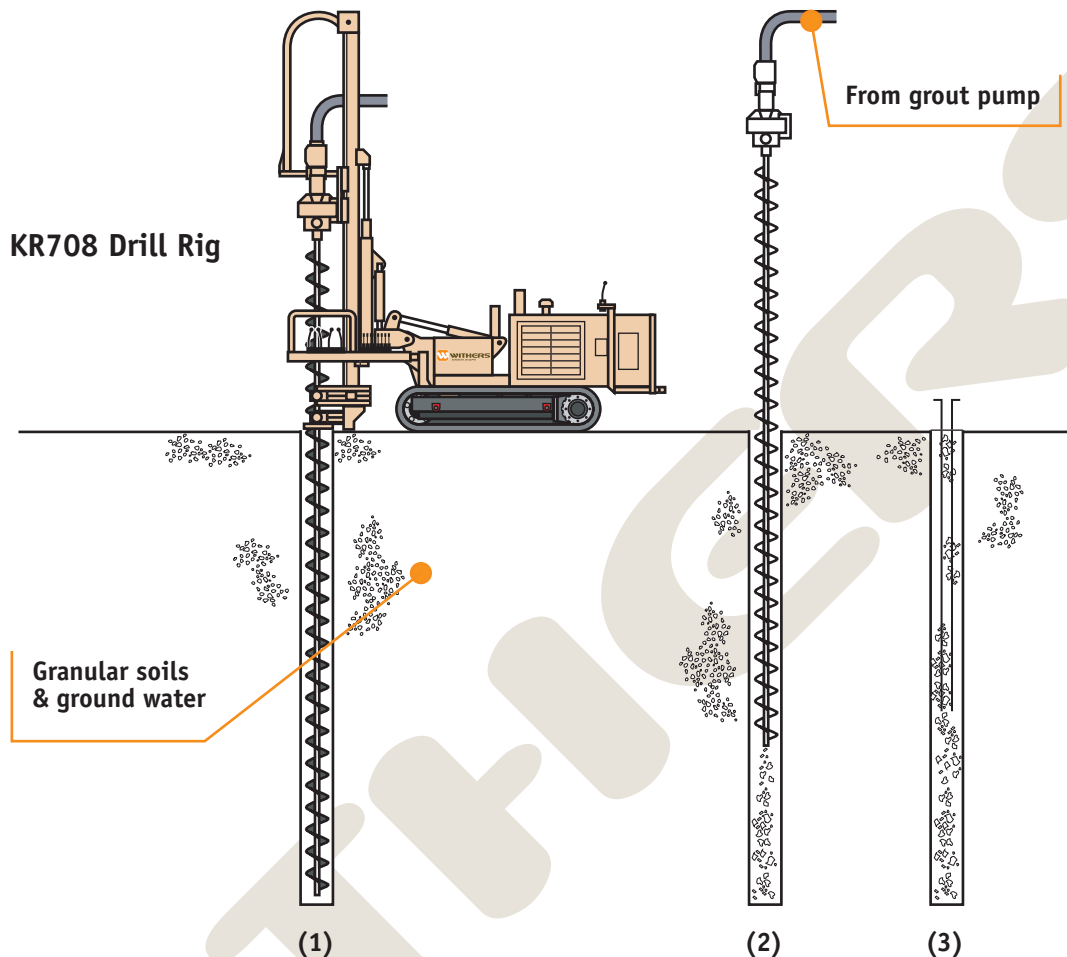

Method

1. Auger to designed length and remove spoil arisings.
2. Grout is pumped through hollow stem auger as the auger is withdrawn.
3. Place reinforcement.

Diameters

- 250 & 300mm

Equipment

- a) Small track mounted limited access rigs using hollow stem segmental augers. Ideal for work inside existing properties or very restricted access sites.
- b) Medium sized track mounted rigs (up to 9T) for the more open sites again using a range of hollow stem segmental augers.